


## Inteligentna Elektronika

Ul. Raduńska 36A  
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojekcji.pl

**CHRISTIE®**

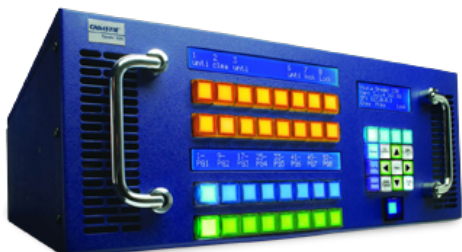

Nazwa **Procesor Christie Spyder X20-1608  
(120-052108-01)**

Cena **0,00 zł**

Producent **Christie**

## OPIS PRODUKTU

### Input Number

X20-0808: 8 Inputs total - 4 Supporting composite, S-Video, Component Analog, HDSDI, SDI and 3G SDO (SMPTE 424M) - 4 Supporting Progressive DVI and Progressive RGBHV

X20-1608: 16 Inputs total - 8 Supporting composite, S-Video, Component Analog, HDSDI, SDI and 3G SDO (SMPTE 424M) - 8 Supporting Progressive DVI and Progressive RGBHV

### Input Signals

Analog RGB, composite, component

DVI, single-link and dual-link (8 inputs are dual-link capable)

SDI, HD-SDI and 3G HD-SDI (SMPTE 424M)

Optional HDCP support

### Pixel Clock

Analog up to 165MHz

DVI up to 330MHz

### Resolutions

Horizontal resolutions up to 2560 and vertical resolutions up to 2160 within 330MHz (any resolution greater than 2048 x 1200 uses 2 input channels)

### Scan Rates

Up to 120Hz dependant on pixel clock rate maximum

### Output Number

8 @ (< 2048x1200) or 4 @ (2560x1600) or combination

### Output Signals

Analog RGB, component

DVI, single-link and dual-link (4 outputs are dual-link capable)

SDI, HD-SDI and 3G HD-SDI (SMPTE 424M)

### Output Pixel Clock

Analog up to 165MHz, DVI up to 265MHz

### Output Resolution

Horizontal resolutions up to 2560 and vertical resolutions up to 2160 within 330MHz (any resolution

greater than 2048 x 1200 uses 2 input channels)

Output Scan Rates

Up to 120Hz dependant on pixel clock rate maximum

Control & Networking

RS232 In/Out

Ethernet (10/100)

Enhanced Feature Sets

Independent aspect ratio and frame rate setup

Overlay's

Transitions

Aspect ratio conversions

Integrated source monitoring

Output rotation (portrait)

Advanced 'auto-sync' functionality

Optional stereoscopic support

Bitmap borders

Window titling

Optional HDCP support

Accessories

Standard: User Manual (CD-ROM and Quick Manual), 2 AC power cords, Spyder X20 control software, rack hardware

Power Requirements

Operating Voltage: 100V AC to 240V AC @ 50/60Hz

Max Current: 9.0A @ 100V AC

Max Power: 900 W

Dissipation: <750 BTU/hr

Operating Environment

Temp: 5 to 35°C (40 to 95° F)

Humidity: 20 - 80% non-condensing

Dimensions

Size: 4RU

Dimensions:(L x W x H): 21.9 x 17.3 x 7.0" (556 x 439 x 178mm)

Shipping dimensions:(LxWxH) 32.3 x 25.5 x 15.0" (820 x 648 x 381mm)

Volume: 2652 cubic in

Weight: 59 lb (27kg)

Shipping weight: 70.5 lb (32kg)

Regulatory

This product conforms to the following regulations related to product safety, environmental requirements and electromagnetic compatibility (EMC):

UL/CSA/IEC 60950 (3rd Edition)

FCC Class A, CE, CCC

RoHS, WEE

Limited Warranty

3 years parts and labour

Contact an authorised Christie representative for full details of our limited warranty