


Inteligentna Elektronika

Ul. Raduńska 36A
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojektacji.pl

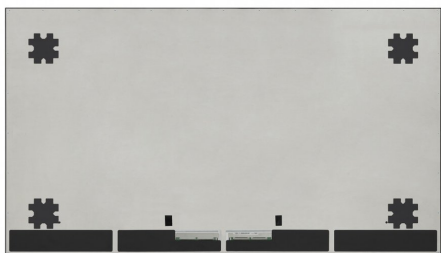

Nazwa **Monitor OLED LG 55EJ5G**

Cena **0,00 zł**

Producent **LG**

OPIS PRODUKTU

Panel

Screen Size 55"

Panel Technology OLED

Native Resolution 1,920 × 1,080 (FHD)

Brightness 150/400 nit (APL 100% / 25%)

Contrast Ratio 150,000 : 1

Color gamut BT709 120%

Viewing Angle (H x V) 178 × 178

Color Depth 10 bit (R), 1.07 Billion Colors

Response Time 1 ms (G to G), 8 ms (MPRT)

Surface Treatment (Haze) Hard Coating (2 H)

Reflectance Typ. 1.2%

Operation Hours (Hours / Day) 18 / 7 (Moving Content Only)

Portrait / Landscape Yes / Yes

Connectivity

Input HDMI (HDCP 1.4), DP (HDCP 1.3), USB 2.0 Type A (2)

Output DP, Audio

External Control RS232C In / Out (w/ IR Out), RJ45 (LAN) In / Out, IR In (External IR Receiver)

Mechanical Specification

Bezel Color Black

Bezel Width *TBD

0.9 mm (Even Bezel) (Off Bezel)

5.3 / 11.0 / 5.3 / 5.3 mm (T/R/L/B) (On Bezel)

Weight (Head) *TBD

6.6 kg (Head)

3.4 kg (Signage Box)

Monitor Dimension (W × H × D) *TBD

1,220.3 × 696.8 × 4.9 mm (Head)

782.8 × 238.4 × 34.7 mm (Signage Box)

Monitor Dimensions with Stand (W × H × D) No

VESA™ Standard Mount Interface No

Feature

Key Feature Internal Memory (16 GB), Temperature Sensor, webOS 4.0, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Sync Mode (RS-232C Sync, Local Network Sync), Video Tag (4), Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Tile Mode Setting, Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, Crestron Connected® (Network based control), Power (PM Mode, Wake on LAN), HDMI-CEC (Compatibility may differ by equipment), SI Server Setting, Pro:Idiom

Environment Conditions

Operation Temperature 0°C to 40°C

Operation Humidity 10% to 80%

Power

Power Supply AC 100-240 V ~, 50/60 Hz

Power Type Built-In Power

Power Consumption (Typ. / Max.) 309 W / 318 W

Power Consumption (Smart Energy Saving) 1,054 BTU/Hr (Typ.), 1,085 BTU/Hr (Max.)

Certification

Safety IEC 60950-1 / EN 60950-1 / UL 60950-1

EMC FCC Class "A" / CE / KC

ErP Yes

Software Compatibility

SuperSign CMS Yes

SuperSign Control / Control+ Yes

SuperSign WB Yes

SuperSign Media Editor Yes

LG ConnectedCare Yes * The availability can differ by region.

Sound

Speaker No

Accessory

Basic Remote Controller, Power Cord, QSG, IR Receiver, Regulation Book, Phone to RS232C Gender, RS232 Cable (4p-4p), FFC Cables (1,600 mm × 4 EA for Connection between Panel and Signage Box), DP Cable, LAN Cable, LC (VLC Cable), Wall Fixer (4 EA), Wall Fixer Install Guide, Install Guide Sheet (2 EA), Tape (10 EA for Cabling / 2 EA for Dust Proof), Screw (M4 × L25, 10 EA / M3 × L5.5, 8 EA)