

---


## Inteligentna Elektronika

Ul. Raduńska 36A  
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojekcji.pl

---

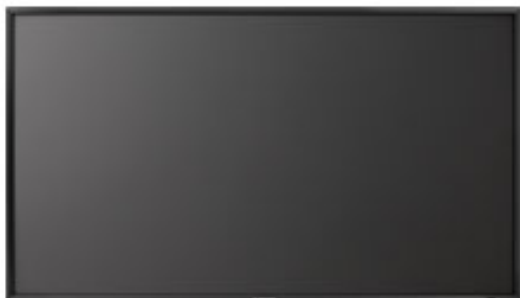

Nazwa

**Monitor Mitsubishi 55" Slim LED LCD  
Public Display MDT552S**

Cena

**0,00 zł**

Producent

**Mitsubishi**

---

## OPIS PRODUKTU

### Model

MDT552S

### Display Characteristics

#### Display Type

55" Widescreen LCD Display

#### Viewable Area

54.6" (138.8 cm) diagonal

#### Native (Maximum) Resolution

1920 x 1080 pixels

#### Aspect Ratio

16:9

#### Colour Depth

Approx. 1.06 billion colours

#### Contrast Ratio

4000:1 (typical)

#### Brightness

450 cd/m<sup>2</sup> (typical)

#### Response Time

6.5 ms (Grey to Grey)

#### Viewing Angle (Left/Right, Up/Down)

±89°, ±89° (typical)

Dot Pitch

0.630mm (H) x 0.630mm (V)

Input Terminals

PC

15 pin D-sub x 1; DVI-D x 1; HDMI x 2; DisplayPort x 1

Video

Composite (BNC) x 1; S-Video x 1

Audio

Stereo mini jack x 1

Control Input

9 pin Mini D-sub (RS232C) x 1; LAN (RJ-45) x 1

Output Terminals

PC/Video

DVI-D x 1, Composite (BNC) x 1

Audio

Stereo mini jack x 1, External Speaker connections

Control Output

9 pin Mini D-sub (RS232C)

Other Terminals

USB Hub

Self-powered hub: 2 upstream (OPS slot, external connection)/2 downstream/USB2.0 compliant

Option Slot

Digital OPS slot (complies with Intel OPS standards)

Frequency Range

Horizontal Frequency

15.625/15.743, 31.5KHz - 91.1KHz (Analogue/Digital)

Vertical Frequency

50/58 Hz - 85 Hz (Analogue/Digital)

Video Compatibility

Composite/S-terminal

NTSC, PAL, SECAM, 4.43 NTSC, PAL-60

Component/SDI

Component: 480i, 480p, 576i, 576p, 1080i, 720p, 1080p

SDI: 480i/576i (SD-SDI), 720p/1080i (HD-SDI), 1080p (3G-SDI)

Physical Characteristics

Operating Voltage

Single phase, 50/60Hz, 100VAC to 240VAC  $\pm$ 10%

Power Consumption

186W (133W without speakers or option slot); Less than 1W in power saving mode

Dimensions (W x H x D)

1249mm x 719mm x 68mm (47mm depth without OPS card, stand or handles)

Internal Speakers

10W+10W

Weight

Approx. 28.5kg

Operating Temperature

0°C ~ 40°C

Operating Air Humidity

20% - 80%

## Regulatory Certification

### Safety

AS/NZS 60950.1:2001

EMI/EMC

AS/NZS CISPR22:2004 (C-Tick)

Accessories

### Supplied

Power Cord, VGA Cable, User Manual, Remote Control, Batteries x 2, Cable Clampers, Screws for Clamper, Bands for Clamper, Wall mount Spacers

### Optional

Stand (ST-461V),

Speakers (SP-551S)

SDI Box (DP-1SDI-3G)