


Inteligentna Elektronika

Ul. Raduńska 36A
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojektacji.pl

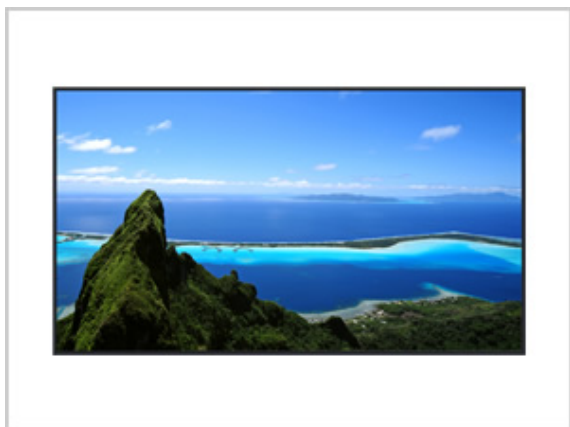

Panasonic
ideas for life

Nazwa **Monitor Panasonic SQ1 Series TH-86SQ1**

Cena **0,00 zł**

Producent **Panasonic**

OPIS PRODUKTU

Dane techniczne:

Specifications (Tentative)

Display Screen size (diagonal)

Panel

Model

98-inch (2489 mm)

Aspect ratio 16:9

Panel type / Backlight IPS Panel / Direct LED

Audio Built-in speaker 20 W [10 W + 10 W]

Power requirements 110–127 V AC, 50/60 Hz, 220–240 V AC, 50/60 Hz

Power consumption TBD

Power off condition Approx. 0.3 W (TBD)

Stand-by condition Approx. 0.5 W (TBD)

Dimensions (W x H x D)

Bezel width

Weight

Wall-hanging pitch 800 x 500 mm (31.5" x 19.7") VESA Compliant

Applicable software Multi Monitoring & Control Software, Content Management Software, Video Wall Manager

Operating environment Temperature : 0 °C to 40°C / Humidity: 20% to 80% (Non-condensation)

Operating time 24 h/day

Brightness (typ.) 500 cd/m²

Response time 8 ms (G to G)

Viewing angle [(T/B)/(L/R)] 178°/178° (CR≥10)

Effective display area (W x H) 2158 x 1214 mm (84.9" x 47.8")

IPS Panel / Edge LED

1200:1

86-inch (2175 mm)

TBD

600 x 400 mm (23.6" x 15.8") VESA Compliant

1895 x 1065 mm (74.6" x 41.9")

2194 x 1249 x 81 mm (86.4" x 49.2" x 3.2") (TBD) 1928 x 1099 x 76 mm (75.9" x 43.3" x 3.0") (TBD)

16.0 mm (0.63") (T/B/L/R) 15.2 mm (0.6") (T/B/L/R)

Contrast ratio (typ.) 1300:1

Resolution 3840 x 2160

Terminals HDMI In

DVI-D In/Audio In (L/R)

HDMI TYPE-A Connector x 2

DisplayPort IN DisplayPort x 1 (TBD)

DisplayPort OUT DisplayPort x 1 (TBD)

Audio Out 30 W [15 W + 15 W]

USB USB Connector (TYPE-A) x 2, DC 5 V/2 A, DC 5V/1A (USB 3.0 Supported)

LAN / DIGITAL LINK LAN: RJ45 x 1, 10 BASE-T / 100 BASE-TX / , Compatible with PLink™ (Shared with DIGITAL LINK)

DIGITAL LINK: RJ45 x 1, 100 BASE-TX, Compatible with long reach mode and PLink™ (Shared with LAN)

Serial D-sub 9-pin x 1, RS232C Compatible

IR In/Out Stereo Mini Jack (M3) x 1 / x 1

DVI-D 24-pin x 1 / Stereo Mini Jack (M3) x 2 (Shared with PC In)

PC In/Audio In (L/R) Mini D-sub 15-pin x 1 / Stereo Mini Jack (M3) x 2 (Shared with DVI-D In)