


## Inteligentna Elektronika

Ul. Raduńska 36A  
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojekcji.pl

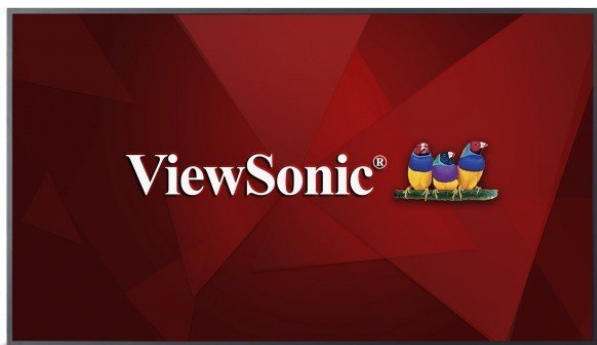

**ViewSonic**  
See the difference™

Nazwa **Monitor 4K LED ViewSonic CDE5010**

Cena **0,00 zł**

Producent **ViewSonic**

## OPIS PRODUKTU

### PARAMETRY:

#### DISPLAY

Panel Size : 50"

Type/ Tech : TFT LCD Module with LED Backlight

Display Area (mm) : 1095.84 (H) x 616.4 (V)

Aspect Ratio : 16:09

Colours : 1.07B colours

Brightness : 350 nits (typ.)

Contrast Ratio : 4000:1 (typ.)

Response Time : 8 ms

Viewing Angles : H = 178, V = 178 (typ.)

Backlight Life : 30,000 Hours

Surface Treatment : Anti-Glare,3H (Haze=2%)

Bezel : Slim

Orientation : Landscape

#### INPUT

HDMI : x2

RGB / VGA : x1

DVI : x1

Audio : x1 PC audio(3.5mm)

RS-232 : x1

IR Pass Thru : x1

SD/SDHC : x1 (Micro SD)

#### OUTPUT

Audio : x1 (RCA)

RS232 : x1

IR Pass Thru : x1

LAN

RJ45 : x1

## USB

Type A : 2.0 Type A : x 1 (USB Playback)

3.0 Type A : x 1 (USB Playback)

## SPEAKERS

10W x 2

## COMPATIBILITY

RGB PC/HDMI PC : Up to 1920x1080 @60Hz. Refer to timing table (RGB PC)

HDMI : 480i, 480p,720p,1080i,1080p, 4K2K@60Hz

DVI : 480i, 480p,720p,1080i,1080p

Android Version : Android 5.0.1

## POWER

Voltage : 100-240 VAC +/- 10% Wide Range

Consumption : Normal 140 W, Max 175 W

## ERGONOMICS

Wall Mount (VESA® ) : 400x400 mm

## OPERATING CONDITIONS

Temperature (° C) : 5 to 40°C

Humidity : 20% ~ 80%

## DIMENSIONS (W X H X D)

Physical (inch / Mm) : 44.24 x 25.46 x 2.67 in/1123.6 x 646.7 x 67.8 mm

Packaging (inch / Mm) : 50.47 x 33.27 x 7.99 in/1282 x 845 x 203 mm

## WEIGHT

Net (lb / Kg) : 13 kg / 28.66 lbs (w/o stand); 14.9 kg / 32.85 lbs (with Stand)

Gross (lb / Kg) : 16.5 kg / 36.38 lbs

## REGULATIONS

NRTL, FCC, ES7.1, Mexico CoC, Mexico energy, CE, CB, RoHS, ErP, REACH,WEEE

## PACKAGE CONTENTS

1. CDE5010 commercial display
2. Remote Control with batteries
3. User manual CD wizard
4. Quick Start Guide
5. Power Cables
6. RS232 cable
7. RS232 daisy chain cable (2.5mm – 2.5mm)
8. IR sensor cable