

---


## Inteligentna Elektronika

Ul. Raduńska 36A  
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojekcji.pl

---

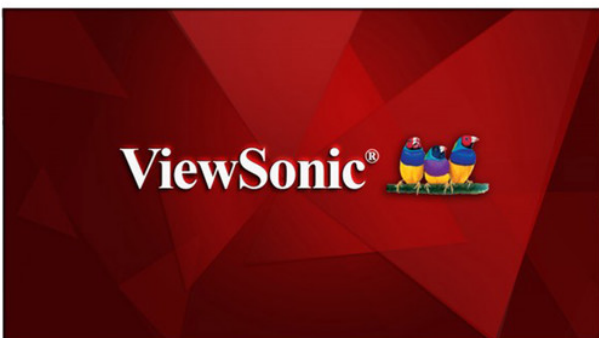

Nazwa **Monitor ViewSonic CDX5552**

Cena **16 449,00 zł**

Producent **ViewSonic**

---

## OPIS PRODUKTU

### SPECIFICATIONS

#### LCD PANEL

Panel Size : 55" (54.64")

Type/ Tech : TFT LCD Module with LED Backlight

Display Area (mm) : 1209.6 x 680.4 mm

Aspect Ratio : 16:09

Resolution : 1920x1080

Colors : 1.06 billion colors

Brightness : 500 nits

Contrast Ratio : 1400:1 Typ.

Response Time : 12 ms

Viewing Angles : 178° / 178°

Backlight : LED Backlight

Backlight Life : 60,000 Hours Typ

Hardness : Hard coating (3H), Anti-glare treatment

#### INPUT

HDMI : x2 (1.4a)

RGB / VGA : x1

DisplayPort : x1 (1.2)

DVI : x1

Audio : x1 (RCA connector)

CVBS : x1 (shared with component Y)

YPbPr : x1  
RS232 : x1  
IR Pass Through : x1  
OPS : x1  
OUTPUT  
DisplayPort : x1 (1.2)  
DVI : x1  
Audio : x1  
RS232 : x1  
IR Pass Through : x1  
LAN  
RJ45 : x1  
USB  
Type A : x1 (2.0)

#### SPEAKERS

10W x2

#### COMPATIBILITY

RGB PC/HDMI PC : Up to 1920x1080 @60Hz. Refer to timing table

CVBS : 480i

YPbPr : 480i, 480p,720p,1080i,1080p

DisplayPort : 480i, 480p,720p,1080i,1080p, 4k2k@30Hz

HDMI : 480i, 480p,720p,1080i,1080p, 4k2k@30Hz

DVI : 480i, 480p,720p,1080i,1080p

#### CONTROLS

Physical- Top OSD : POWER, MUTE, INPUT, VOL +/-, UP, DOWN, MENU

Picture style, Restore style, Backlight, Colour, Sharpness, Noise reduction, MPEG artifact reduction, Digital Crystal Clear, Advanced, Game or computer, Format and edges, Input resolution

Sound style, Restore style, Bass, Treble, Balance, Surround mode, Audio Out, Advanced Enable, H monitors, V monitors, Position, Frame Comp.

Menu language, Monitor ID, Eco mode, Auto search, Clock, Scheduling, Sleep timer, CEC, Auto adjust, Local KB lock, RC lock, Pixel shift, Smart power, Wake on lan, Switch on state, Light sensor, LED, Switch on delay, Logo, APM, Information OSD, DisplayPort Ver., Cooling fan, Network control port, Factory settings.

View network settings, Network configuration, Static IP Configuration, Digital Media Renderer-DMR, Network name

Embedded Linux OS : N/A

Multimedia : N/A

#### POWER

Voltage : 100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz

Consumption : "On" 185W(typ)

"Power Saving" < 0.5 W

"Off" (Suspend) < 0.5 W

#### ERGONOMICS

Tilt : N/A

Wall Mount (VESA®) : 400 x 400 mm

#### OPERATING CONDITIONS

Temperature (°C) : 5- 40°C (landscape)

5- 35°C (portrait)

Humidity : 20% ~ 80% non-condensing

#### DIMENSIONS

Physical (inch / Mm) : 1213.4 x 684.2 x 95.0 mm (w/o Stand)

1213.4 x 726.2 x 400 mm (with Stand)

Packaging (inch / Mm) : 1551 x 961 x 450 mm

#### WEIGHT

Net (lb / Kg) : 29.2 kg (w/o stand)

31.5 kg (with stand)

Gross (lb / Kg) : 43.4kg

#### REGULATIONS

Standard : CE, CB, WEEE, C-tick, FCC, ICES003, UL/cUL, CE,CB, CU, Energy star 6.0,RoHS, ErP, REACH, PSB, RCM, SASO, EPEAT, UL-MX-CoC,CONUEE

#### WHAT'S IN THE BOX?

1. CDX5552 LCD Monitor
2. Remote Control with batteries
3. User manual CD wizard
4. Quick Start Guide
5. Power Cables
6. VGA cable
7. RS232 cable
8. IR sensor cable

\*Actual content may differ from market to market