


## Inteligentna Elektronika

Ul. Raduńska 36A  
83-333 Chmielno

Tel.: +48 730 90 60 90

E-mail: info@centrumprojekcji.pl

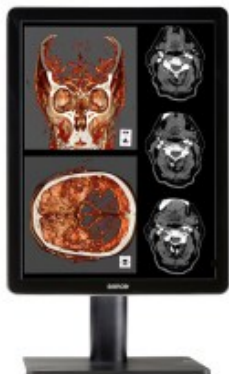

**BARCO**

Nazwa **Nio Color 2MP LED (MDNC-2221) 2MP high-bright color display system**

Cena **0,00 zł**

Producent **Barco**

## OPIS PRODUKTU

Screen technology

TFT AM Color LCD IPS

Backlight

LED

Active screen size (diagonal)

540 mm (21.3")

Active screen size (H x V)

432 x 324 mm (17.0 x 12.8")

Aspect ratio (H:V)

4:3

Resolution

2MP (1600 x 1200)

Pixel pitch

0.27 mm

Color imaging

Yes

Gray imaging

Yes

Color support

30 bit

Viewing angle (H, V)

178°

Front sensor

Yes

Uniform Luminance Technology (ULT)

Yes

Ambient Light Compensation (ALC)

No  
Backlight Output Stabilization (BLOS)  
Yes  
Maximum luminance  
800 cd/m<sup>2</sup>  
DICOM calibrated luminance  
400 cd/m<sup>2</sup>  
Contrast ratio (ULT off)  
1400:1  
Response time (Tr + Tf)  
20 ms  
Video input signals  
DVI-D Dual Link, DisplayPort  
USB ports  
1 upstream (endpoint), 2 downstream  
USB standard  
2.0  
Power consumption (nominal)  
36W  
Power save mode  
Yes  
Dimensions with stand (W x H x D)  
Portrait:378x528~628x235mm/Landscape:491x472~572x235mm  
Dimensions w/o stand (W x H x D)  
Portrait:378x491x84mm/Landscape:491x378x84mm  
Net weight with stand  
12.6 kg (with protective cover)  
Mounting standard  
VESA (100 mm)  
Screen protection  
Protective, non-reflective glass cover  
Recommended modalities  
CT, MR, US, DR, CR, NM, Film  
Certifications  
CE0120 (MDD 93/42/EEC; A1:2007/47/EC class II b product), CE - 2004/108/EC, IEC 60950-1:2005 + A1:2009 (2ND EDITION), IEC 60601-1:2005 + A1:2012, ANSI/AAMI ES 60601-1:2005 + C1:2009 + A1:2012, CAN/CSAC22.2 No. 60601-1(2008), DEMKO - EN 60601-1:2006, EN 60601-1-2:2007, CCC - GB9254-2008 + GB4943.1-2011 + GB17625.1-2003, KCC pending, VCCI, FCC class B, ICES-001 Level B, FDA 510(k), RoHS  
Supplied accessories  
Getting Started Guide, Quick-Installation Sheet /Video cable (DVI Dual Link), USB 2.0 cable, DisplayPort cable /Main cables (UK, European (CEBEC/KEMA), USA (UL/CSA; adaptor plug NEMA 5-15P), Chinese (CCC))/External power supply  
QA software  
MediCal QAWeb  
Warranty  
5 years